


300/500 V 70°C 60227 IEC 10

2 CORES - LIGHT POLYVINYL CHLORIDE SHEATHED CABLE WITH GROUND

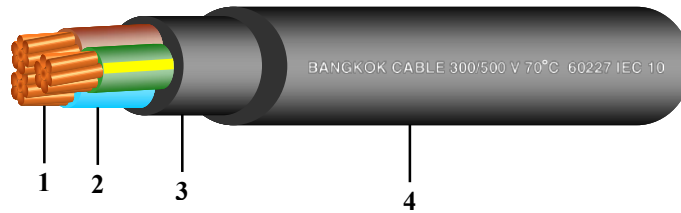

Construction

- 1. Conductor : Solid or circular stranded annealed copper
- 2. Insulation : Polyvinyl chloride (PVC)
Colour code : Phase - Blue, Brown
Ground - Green/Yellow
- 3. Inner covering : Polyvinyl chloride (PVC), Black colour
- 4. Outer sheath : Polyvinyl chloride (PVC), Black colour

Standard :

TIS 11 Part 4-2553



Classification

- Maximum conductor temperature : 70°C
- Rated Voltage : 300/500 V
- AC test voltage : 2,000 V

Application

- Use for general purpose
- For installation in raceway and shall be protected water into raceway
- Laid on cable trays/Cable ladder
- **Do not install in duct in ground or direct burial in ground**

Products code	No. of core	Conductor				Thickness of insulation mm	Thickness of inner covering mm (Approx.)	Thickness of outer sheath mm	Overall diameter		Insulation resistance at 70°C MΩ.km (Min.)	Current rating Laid on cable ladder A	Cable weight kg/km (Approx.)	Standard length m
		Cross-sectional area mm ²		No. of wires (Min.)	Diameter mm (Approx.)				Lower limit mm	Upper limit mm				
		Phase	Ground											
C3LE022X1012	2	1.5	1.5	1	1.36	0.7	0.4	1.2	8.0	10.5	0.011	16	140	100/C
C3LE022X4012	2	1.5	1.5	7	1.59	0.7	0.4	1.2	8.2	11.0	0.010	16	150	100/C
C3LE023X1012	2	2.5	2.5	1	1.75	0.8	0.4	1.2	9.2	12.0	0.010	22	190	100/C
C3LE023X4012	2	2.5	2.5	7	2.01	0.8	0.4	1.2	9.4	12.5	0.009	22	210	100/C
C3LE024X1012	2	4	4	1	2.21	0.8	0.4	1.2	10.0	13.0	0.0085	30	250	100/C
C3LE024X2012	2	4	4	7	2.55	0.8	0.4	1.2	10.5	13.5	0.0077	30	270	100/C
C3LE025X1012	2	6	6	1	2.70	0.8	0.4	1.4	11.5	14.5	0.0070	37	340	100/C
C3LE025X2012	2	6	6	7	3.12	0.8	0.4	1.4	12.0	15.5	0.0065	37	370	100/C
C3LE026X1012	2	10	10	1	3.50	1.0	0.6	1.4	14.0	17.5	0.0070	52	540	100/C
C3LE026X2011	2	10	10	7	3.98	1.0	0.6	1.4	14.5	19.0	0.0065	52	590	500/D
C3LE027X2011	2	16	16	7	5.01	1.0	0.8	1.4	16.5	21.5	0.0052	70	840	500/D
C3LE025Z2011	2	25	25	7	6.33	1.2	0.8	1.6	20.5	26.0	0.0050	88	1,270	500/D
C3LE026Z2011	2	35	35	7	7.60	1.2	1.0	1.6	22.0	29.0	0.0044	110	1,680	500/D

C = Packing in coil

D = Packing in drum

300/500 V 70°C 60227 IEC 10

3 CORES - LIGHT POLYVINYL CHLORIDE SHEATHED CABLE WITH GROUND



Construction

1. Conductor : Solid or circular stranded annealed copper
2. Insulation : Polyvinyl chloride (PVC)
Colour code : Phase - Brown, Black, Grey
Ground - Green/Yellow
3. Inner covering : Polyvinyl chloride (PVC), Black colour
4. Outer sheath : Polyvinyl chloride (PVC), Black colour

Standard :

TIS 11 Part 4-2553



Classification

- Maximum conductor temperature : 70°C
Rated Voltage : 300/500 V
AC test voltage : 2,000 V

Application

- Use for general purpose
- For installation in raceway and shall be protected water into raceway
- Laid on cable trays/Cable ladder
- **Do not install in duct in ground or direct burial in ground**


Products code	No. of core	Conductor				Thickness of insulation mm	Thickness of inner covering mm (Approx.)	Thickness of outer sheath mm	Overall diameter		Insulation resistance at 70°C MΩ.km (Min.)	Current rating Laid on cable ladder A	Cable weight kg/km (Approx.)	Standard length m
		Cross-sectional area mm ²		No. of wires (Min.)	Diameter mm (Approx.)				Lower limit mm	Upper limit mm				
		Phase	Ground											
C3LE032X1012	3	1.5	1.5	1	1.36	0.7	0.4	1.2	8.6	11.5	0.011	16	170	100/C
C3LE032X4012	3	1.5	1.5	7	1.59	0.7	0.4	1.2	9.0	12.0	0.010	16	180	100/C
C3LE033X1012	3	2.5	2.5	1	1.75	0.8	0.4	1.2	10.0	13.0	0.010	22	240	100/C
C3LE033X4012	3	2.5	2.5	7	2.01	0.8	0.4	1.2	10.0	13.5	0.009	22	250	100/C
C3LE034X1012	3	4	4	1	2.21	0.8	0.4	1.4	11.5	14.5	0.0085	30	330	100/C
C3LE034X2012	3	4	4	7	2.55	0.8	0.4	1.4	12.0	15.0	0.0077	30	350	100/C
C3LE035X1012	3	6	6	1	2.70	0.8	0.6	1.4	12.5	16.0	0.0070	37	440	100/C
C3LE035X2012	3	6	6	7	3.12	0.8	0.6	1.4	13.0	17.0	0.0065	37	480	100/C
C3LE036X1011	3	10	10	1	3.50	1.0	0.6	1.4	15.5	19.0	0.0070	52	670	500/D
C3LE036X2011	3	10	10	7	3.98	1.0	0.6	1.4	16.0	20.5	0.0065	52	740	500/D
C3LE037X2011	3	16	16	7	5.01	1.0	0.8	1.4	18.0	23.5	0.0052	70	1,060	500/D
C3LE035Z2011	3	25	25	7	6.33	1.2	1.0	1.6	22.5	28.5	0.0050	88	1,640	500/D
C3LE036Z2011	3	35	35	7	7.60	1.2	1.0	1.6	24.5	32.0	0.0044	110	2,130	500/D

C = Packing in coil

D = Packing in drum

300/500 V 70°C 60227 IEC 10

4 CORES - LIGHT POLYVINYL CHLORIDE SHEATHED CABLE WITH GROUND

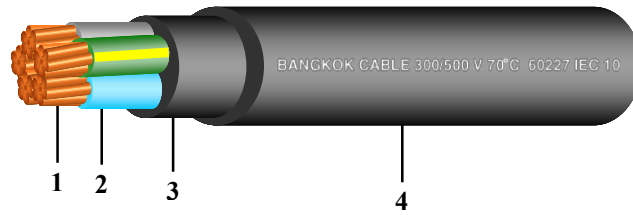

Construction

1. Conductor : Solid or circular stranded annealed copper
2. Insulation : Polyvinyl chloride (PVC)
Colour code : Phase - LBlue, Brown, Black, Grey
Ground - Green/Yellow
3. Inner covering : Polyvinyl chloride (PVC), Black colour
4. Outer sheath : Polyvinyl chloride (PVC), Black colour

Standard :

TIS 11 Part 4-2553



Classification

- Maximum conductor temperature : 70°C
Rated Voltage : 300/500 V
AC test voltage : 2,000 V

Application

- Use for general purpose
- For installation in raceway and shall be protected water into raceway
- Laid on cable trays/Cable ladder
- *Do not install in duct in ground or direct burial in ground*

Products code	No. of core	Conductor				Thickness of insulation mm	Thickness of inner covering mm (Approx.)	Thickness of outer sheath mm	Overall diameter		Insulation resistance at 70°C MΩ.km (Min.)	Current rating Laid on cable ladder A	Cable weight kg/km (Approx.)	Standard length m
		Cross-sectional area mm ²		No. of wires (Min.)	Diameter mm (Approx.)				Lower limit mm	Upper limit mm				
		Phase	Ground											
C3LE042X1012	4	1.5	1.5	1	1.36	0.7	0.4	1.2	9.4	12.0	0.011	16	210	100/C
C3LE042X4012	4	1.5	1.5	7	1.59	0.7	0.4	1.2	9.8	12.5	0.010	16	220	100/C
C3LE043X1012	4	2.5	2.5	1	1.75	0.8	0.4	1.2	11.0	14.0	0.010	22	290	100/C
C3LE043X4012	4	2.5	2.5	7	2.01	0.8	0.4	1.2	11.0	14.5	0.009	22	310	100/C
C3LE044X1012	4	4	4	1	2.21	0.8	0.6	1.4	12.5	16.0	0.0085	30	420	100/C
C3LE044X2012	4	4	4	7	2.55	0.8	0.6	1.4	13.0	17.0	0.0077	30	450	100/C
C3LE045X1012	4	6	6	1	2.70	0.8	0.6	1.4	13.5	17.5	0.0070	37	550	100/C
C3LE045X2012	4	6	6	7	3.12	0.8	0.6	1.4	14.5	18.5	0.0065	37	600	100/C
C3LE046X1011	4	10	10	1	3.50	1.0	0.6	1.4	17.0	21.0	0.0070	52	850	500/D
C3LE046X2011	4	10	10	7	3.98	1.0	0.6	1.4	17.5	22.0	0.0065	52	920	500/D
C3LE047X2011	4	16	16	7	5.01	1.0	0.8	1.6	20.5	26.0	0.0052	70	1,350	500/D
C3LE045Z2011	4	25	25	7	6.33	1.2	1.0	1.6	24.5	31.5	0.0050	88	2,050	500/D
C3LE046Z2011	4	35	35	7	7.60	1.2	1.2	1.6	27.0	35.0	0.0044	110	2,710	500/D

C = Packing in coil

D = Packing in drum